

DS



(11) Publication number: **0 540 030 A2**

(12) **EUROPEAN PATENT APPLICATION**

(21) Application number: **92118625.0**

(51) Int. Cl.⁵: **H01R 4/64, H01R 4/26**

(22) Date of filing: **30.10.92**

(30) Priority: **31.10.91 US 786243**

(43) Date of publication of application:
05.05.93 Bulletin 93/18

(84) Designated Contracting States:
DE ES FR IT

(71) Applicant: **PROFIL- Verbindungstechnik GmbH & Co. KG**
Otto-Hahn-Strasse 22-24
W- 6382 Friedrichsdorf(DE)

(72) Inventor: **Ladouceur, Harold A.**
30123 Bentley
Livonia, Michigan 48154(US)
 Inventor: **Müller, Rudolf R.M.**
Fasanenweg 6
W- 6000 Frankfurt- 56(DE)


(74) Representative: **Dipl.-Phys.Dr. Manitz**
Dipl.-Ing.Dipl.-Wirtsch.-Ing. Finsterwald
Dipl.-Phys. Rotermund Dipl.-Chem.Dr.
Heyn B.Sc.(Phys.) Morgan
Robert-Koch-Strasse 1
W- 8000 München 22 (DE)

(54) **Electrical grounding stud.**

(57) An electrical grounding connector, electrical grounding connector assembly, and a method of attaching an electrical grounding connector and electrical grounding connector assembly to an electrically conductive panel is disclosed. The grounding connector assembly includes a grounding stud connector having a body portion disposed between, and integrally joining, a stud portion and a riveting portion. The body portion includes a flange extending generally radially from the body portion and the flange includes a panel engaging surface and a lug engaging surface. A protective nut is adapted to engage in substantially cover the stud portion of the grounding stud connector thereby protecting the stud portion from contaminants. Barbed elements are disclosed on various surfaces of the grounding connector thereby giving the grounding connector excellent electrically conductive properties when it is assembled to an electrically conductive panel. In a preferred embodiment, the grounding connector is preassembled with the protective nut, thereby allowing the assembly to be

installed on an electrically conductive panel in one step. While the grounding connector and connector assembly is particularly suited for self-piercing applications, it may be used equally well in prepierced applications.

Fig-1



EP 0 540 030 A2

BEST AVAILABLE COPY

TECHNICAL FIELD

The present invention generally relates to fasteners and more particularly relates to riveting fasteners, including studs, bolts, nuts or the like, including methods of attaching such fasteners to an electrically conductive panel, wherein the fastener primarily functions as an electrical grounding connection to the electrically conductive panel.

RELATED APPLICATIONS

This application relates to a further development of the subject matter of U.S. Patent Application Serial No. 491,925, filed March 12, 1990, now U.S. Patent No. _____, which application is a divisional application of U.S. Patent Application Serial No. 196,209 filed May 19, 1988, now U.S. Patent No. 4,915,558, which application is a divisional application of Serial No. 892,017, filed August 1, 1986, now U.S. Patent No. 4,765,057, which application is a divisional application of Serial No. 773,387, filed September 6, 1985, now U.S. Patent No. 4,633,560, which application is a divisional application of Serial No. 563,833, filed December 21, 1983, now U.S. Patent No. 4,555,838, which application is a continuation-in-part application of Serial No. 485,099, filed March 28, 1983, now U.S. Patent No. 4,459,073 and Serial No. 504,074, filed June 14, 1983, now U.S. Patent No. 4,543,701, which applications are, respectively, divisional and continuation applications of Serial No. 229,274, filed January 28, 1981, now abandoned, which claims priority to an application filed February 2, 1980 in the Federal Republic of Germany, Serial No. 3003908.

BACKGROUND OF THE INVENTION

U.S. Patent No. 3,299,500 and 3,314,138, disclose self-piercing female elements, including nuts, which may be simultaneously clinched to secure the nut in a panel opening. Additionally, U.S. Patent Nos. 3,938,239 and 4,018,257 disclose self-riveting nuts, including nuts having an annular skirt or barrel portion wherein the free end of the barrel portion is deformed radially outwardly in a die member to form a mechanical interlock with a panel. However, the self-riveting nuts disclosed in the above referenced patents are secured to the panel having a pre-pierced panel opening. This has the disadvantage of requiring two separate operations, the first operation involves creating the panel opening, and a second operation involves installing the female fastener. Additionally, such methods also require very precise centering of the nut relative to the pre-pierced panel opening, wherein a spring biased pin is received through the

panel opening and the nut is centered on the pin prior to installation. U.S. Patent No. 3,926,236 discloses a method of attaching a nut to a panel wherein the panel is pierced by a punch which extends through the nut bore to pierce and secure the nut to a panel in continuous operation, however, the fastener is not a riveting-type fastener which has a barrel portion extending through the pierced panel opening.

U.S. Patent No. 3,800,401 discloses methods of attaching closures to a container such as a tag ring in a continuous operation. This application and the above-referenced related patents and applications disclose methods and apparatus for attaching male and female elements to a panel in a continuous operation. The preferred methods of installation do not require pre-piercing of the panel, although the fastener is equally suited for installing in a pre-pierced panel opening.

U.S. Patent Nos. 4,193,333 and 3,871,264 disclose means of attaching a stud-like fastener, wherein the stud includes an annular end portion which penetrates a plate or structural steel member, which may be deformed radially around a plug pierced from the panel.

U.S. Patent Nos. 1,976,019; 2,456,118; 2,521,505; 3,436,803; 3,754,731; 4,039,099; and 4,092,773 disclose various riveting techniques, wherein the fastener includes an annular end portion which may be press-fitted through an opening in a panel. The annular end portion is then riveted or radially outwardly deformed by a die member having an annular semi-toroidal die cavity and may include a projecting central die portion which is received in the annular riveting end of the fastener.

Although the above-referenced patents do disclose self-riveting male and female fasteners, and methods of installing same, they do not disclose a riveting stud type fastener which is suited for making a reliable electrical grounding connection to a metal panel or the like. For example, U.S. Patent Nos. 4,193,333 and 3,871,264 which disclose methods of attaching stud fasteners to a panel, primarily teach a methodology for providing superior mechanical interlock between the stud fastener and the panel and do not address the issue of the electrical integrity of the connection. It is well known that a fastener can provide excellent mechanical bonding to a panel while providing unacceptable electrical conductivity to the same panel. For example, various coatings could be present on an electrically conductive panel which, although not interfering with the mechanical interlock between the stud fastener and the panel, may partially, or entirely impede the flow of electrical current through the fastener and panel interface.

Accordingly, it is the primary object of this invention to provide a stud type fastener which is adapted to be attached to an electrically conductive panel wherein the fastener provides both superior mechanical connection to the panel while also providing excellent electrical conductivity across the fastener/panel interface. Further, the fastener and method herein disclosed are particularly suited for mass production applications, particularly automotive applications utilizing automatic presses. The fastener of the present invention can be used in a panel having a pre-pierced opening, but is not limited to pre-pierced applications inasmuch as the present fastener is adapted to pierce the panel during the installation process.

SUMMARY OF THE INVENTION

In light of the foregoing, the present invention provides an electrical grounding connector for attachment to an electrically conductive panel. The electrical grounding connector is of the type having a body portion disposed between, and integrally joining, a stud portion and a riveting portion, wherein the riveting portion may be a piercing and riveting portion and wherein the body portion includes a flange portion extending generally radially from the body portion, the flange portion including a panel engaging surface and a lug engaging surface. The electrical grounding connector includes a first barb disposed on at least one of the riveting portion and the panel engaging surface of the flange portion for conducting electrical current between the electrical grounding connector and the conductive panel when the electrical grounding connector is joined to the electrically conductive panel. A second barb is disposed on at least one of the stud portion and the lug engaging surface of the flange portion for conducting electrical current between the electrical grounding connector and a conductive lug when the conductive lug is joined to the electrical grounding connector. The barbs act to penetrate any non-conductive material disposed on the electrically conductive panel or the lug such as paint or other coatings thereby providing electrical continuity between the lug and the electrically conductive panel via the electrical grounding connector.

Preferably, the riveting portion of the electrical grounding connector includes an annular wall for defining a socket within the riveting portion and also the annular wall is preferably adapted to pierce the electrically conductive panel. The annular wall of the electrical grounding connector is preferably continuous and is adapted to pierce a slug from the electrically conductive panel. Preferably the first barb extends between, and is integral with, the riveting portion and the panel en-

gaging surface of the flange portion of the electrical grounding connector. Preferably the second barb extends between, and is integral with, the stud portion and the lug engaging surface of the flange portion.

In a preferred embodiment, the second barb includes a projection having a generally polyhedron form and the flange portion of the electrical grounding connector preferably includes an outer surface having a generally cylindrical contour.

In an alternative embodiment, the present invention includes an electrical grounding connector assembly for attachment to an electrically conductive panel, the electrical grounding connector assembly of the type having a portion disposed between, and integrally joining, a stud portion and a riveting portion, the body portion including a flange portion extending generally perpendicular from the body portion, the flange having a panel engaging surface and a lug engaging surface. The electrical grounding connector assembly includes barbed means, disposed on at least one of the riveting portion and the panel engaging surface of the flange portion, for conducting electrical current between the electrical grounding connector assembly and the conductive panel when the electrical grounding connector is joined to the electrically conductive panel. Also, the electrical grounding connector assembly includes a cap adapted to cooperatively engage and substantially cover the stud, and also adapted to cover the lug engaging surface of the flange thereby protecting the stud portion and the lug engaging surface of the flange from contaminants.

Preferably, the riveting portion of the electrical grounding connector assembly includes an annular wall defining a socket within the riveting portion wherein the annular wall is adapted to pierce the electrically conductive panel. The annular wall of the electrical grounding connector assembly is preferably continuous and is adapted to pierce a slug from the electrically conductive panel. The barbed portion preferably extends between, and is integral with, the riveting portion and the panel engaging surface of the flange portion. The flange portion of the electrical grounding connector assembly preferably includes an outer surface having a generally cylindrical contour.

The lug engaging surface of the flange of the electrical grounding connector assembly preferably includes a portion proximate the stud wherein the portion of the stud proximate the stud is raised relative to a portion of the flange distal the stud. The portion of the flange distal the stud preferably includes a plunger engaging surface for engaging a plunger which is adapted to drive the connector assembly into the electrically conductive panel.

In one embodiment of the electrical grounding connector assembly, the panel engaging surface of the flange includes a plurality of spaced pockets. Other embodiments of the electrical grounding connector assembly include a flange portion which has a generally polygonal outer surface. Still other embodiments include a generally polygonal flange portion which has depressions (or channels) superimposed thereon and the depressions are preferably arcuate. Other embodiments include a flange portion having a general polygonal contour which has arcuate raised surfaces superimposed thereon. Yet, in another embodiment, the flange portion of the electrical grounding connector assembly includes an outer surface having a generally hypocycloid contour. Preferably, the hypocycloid outer contour includes eight cusps.

In a preferred embodiment of the electrical grounding connector assembly, the cap is made from a metal and includes a load bearing flange having first and second opposed load bearing surfaces. The first load bearing surface is adapted to engage the lug engaging surface of the flange portion of the grounding stud connector and the second load bearing surface is adapted to engage a plunger which is adapted to drive the grounding connector assembly into the electrically conductive panel. In an alternative embodiment, the metal cap includes first and second load bearing, opposing ends, wherein the first load bearing end is adapted to engage the lug engaging surface of the flange portion of the grounding connector and the second load bearing end is adapted to engage a plunger for driving the connector assembly into the conductive panel.

Still, in another aspect, the electrical grounding connector assembly of the present invention includes a male fastener fastened to a plastically deformable panel member and a female element which engages the male fastener. The male fastener includes a body portion disposed between, and integrally joining, a stud portion and a riveting portion, the body portion includes a flange extending generally radially outward from the body portion, the flange includes a panel engaging surface and a lug engaging surface, the riveting portion terminating in a radially deformed lip, the male fastener also including first barbed elements disposed on at least one of the panel engaging surface of the flange and the riveting portion for conducting electrical current between the male fastener and the electrically conductive member. The plastically deformable, electrically conductive panel member includes an opening intimately surrounding the riveting portion of the male fastener. The male fastener is entrapped within the panel opening between the radially deformed lip and the radially extending flange wherein the first barbed

element is in continuous electrical contact with the electrically conductive panel thereby forming an electrically conductive path between the electrically conductive panel and the male fastener. The female element includes a body portion having an axial bore therein, the axial bore being adapted to engage the stud portion of the male fastener, wherein the female element is adapted to cover the stud portion of the male fastener and also cover the lug engaging surface of the flange thereby protecting the stud portion and the lug engaging surface of the flange from contaminants.

The radially deformed lip of the riveting portion is preferably deformed outwardly and comprises a generally U-shaped channel which opens generally toward the flange portion of the male fastener. The panel member preferably includes a generally planar portion distal the panel opening and a deformed panel portion proximate the panel opening, the deformed panel portion being displaced from the planar portion, the deformed panel portion thereby engaging the first barbed element and providing a path for electric current between the panel member and the male fastener. Preferably, the riveting portion includes an annular wall which defines a socket within the riveting portion and the annular wall is preferably adapted to pierce the electrically conductive panel member. The annular wall is preferably continuous and is adapted to pierce a slug from the electrically conductive panel. The first barbed means preferably extends between, and is integral with, the riveting portion and the panel engaging surface of the flange portion. The flange portion includes an outer surface having a generally cylindrical contour.

In a preferred embodiment, the lug engaging surface of the flange includes a portion of the flange proximate the stud wherein the portion of the flange proximate the stud is raised relative to the portion of the flange distal the stud. The flange portion distal the stud preferably includes a plunger engaging surface for engaging a plunger which is adapted to drive the connector assembly into the electrically conductive panel. Preferably, the panel engaging surface of the flange includes a plurality of spaced pockets.

Preferably, a second barbed element is disposed on at least one of the stud portion and the lug engaging surface of the flange portion, for conducting electrical current between the male fastener element and a conductive lug when the conductive lug is forced against the second barbed element by the female element. The female element is preferably metal and, in one preferred embodiment includes a load bearing flange having a first and second opposed load bearing surfaces, the first load bearing surface being adapted to engage the lug engaging surface of the flange

portion of the grounding stud connector and the second load bearing surface being adapted to engage a plunger, wherein the plunger is adapted to drive the grounding connector assembly into the electrically conductive panel. In the second preferred embodiment, the metal female element includes first and second load bearing, opposing ends, the first load bearing end adapted to engage the lug engaging surface of the flange portion of the ground connector and the second load bearing end adapted to engage a plunger wherein the plunger is adapted to drive the connector assembly into the conductive panel.

The present invention also contemplates a method of attaching an electrical grounding connector assembly to an electrically conductive panel, the electrical grounding connector assembly of the type having a grounding stud connector and a displaceable cap, the grounding stud connector having a body portion disposed between, and integrally joining, a stud portion and a riveting portion, the body portion including a flange portion extending generally radially from the body portion, the flange having a panel engaging surface and a lug engaging surface, the electrical grounding connector assembly including barbed elements disposed on at least one of the riveting portion and the panel engaging surface of the flange portion, for conducting electrical current between the electrical grounding connector assembly and the conductive panel when the electrical grounding connector is joined to the electrically conductive panel, the displaceable cap being adapted to cooperatively engage and substantially cover the stud portion and also adapted to cover the lug engaging surface of the flange thereby protecting the stud portion and the lug engaging surface of the flange from contaminants. The method comprising the steps of: (a) placing the riveting portion of the electrical grounding connector assembly adjacent the electrically conductive panel; (b) passing the riveting portion through the panel thereby causing the barbed elements to contact the panel providing a path for electrical current between the electrical grounding connector assembly and the panel; (c) radially deforming the riveting portion of the grounding stud connector thereby mechanically bonding the electrical grounding connector assembly to the panel; (d) displacing the cap from the lug engaging surface; and (e) securing an electrically conductive lug against the lug engaging surface of the flange. Preferably the step (b) of the method includes simultaneously using the riveting portion of the grounding stud connector for piercing a slug from the panel. Step (c) of the method preferably includes deforming the panel riveting portion of the grounding stud connector into a U-shaped channel, the channel opening generally

toward the flange of the grounding stud connector wherein the panel substantially fills the U-shaped opening in interlocking engagement therewith. Step (b) of the method can be performed by exerting a force against the flange portion of the grounding stud connector and can also be performed by exerting a force against the cap. Preferably, step (e) is performed by moving the displaced cap toward the lug engaging surface of the flange.

The connector and connector assembly of the present invention is particularly suited for transfer from a hopper or other source to an installation device. The connector and a connector assembly may be arrayed within the installation device by automatic means that stacks and aligns the connectors readying them for installation.

It will be understood by those skilled in the art that the terms used herein to generally describe the connector (such as female and male connectors) are used only as short-hand labels and the actual geometry of the connectors may take on a multiplicity of forms. As used herein, "connector" or "fastener" refers not only to the function of the connector or fastener to attach one member to a panel, but also the means of attaching the fastener or connector to the panel.

Other advantages and meritorious features will be more fully understood from the following description of the preferred embodiments of the grounding connector, grounding connector assemblies and method of installing same, the appended claims and the drawings, a brief description of which follows.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an isometric view of a first embodiment of the electrical grounding stud of the present invention.

Figure 2 is a partial cross sectional view of the electrical grounding stud of figure 1 and a typical installation apparatus.

Figure 3 is a partial cross sectional side view of the electrical grounding stud of Figure 1 shown installed in an electrically conductive panel.

Figure 4 is a partial cross sectional top view of the first embodiment of the electrical grounding stud of the present invention taken substantially along lines 4-4 of Figure 2.

Figure 5 is a cross sectional bottom view of the first embodiment of the electrical grounding stud of the present invention taken substantially along lines 5-5 of Figure 3.

Figure 6 is a partial cross sectional view of the first embodiment of the electrical grounding stud assembly of the present invention shown installed in a panel the assembly including a grounding lug and a first embodiment of a protective lug nut of

the present invention.

Figure 7 is a side view of the first embodiment of the electrical grounding stud of the present invention shown installed in a panel with a grounding lug and a second embodiment of the protective lug nut of the present invention.

Figure 8 is an isometric view of a second embodiment of an electrical grounding stud of the present invention and a third embodiment of the protective lug nut of the present invention.

Figure 9 is a top view of the second embodiment of the electrical grounding stud of the present invention taken substantially along lines 9-9 of Figure 8.

Figure 10 is a partial cross sectional side view of the second embodiment of the electrical grounding stud of the present invention taken substantially along lines 10-10 of Figure 9.

Figure 11 is a partial cross sectional view of a typical installation apparatus used to install the second embodiment of the electrical grounding stud of the present invention into an electrically conductive panel.

Figure 12 is a cross sectional bottom view of the second embodiment of the electrical grounding stud of the present invention and the installation plunger of a typical installation apparatus taken substantially along lines 12-12 of Figure 11.

Figure 13 is a partial cross sectional view of the second embodiment of the electrical grounding stud of the present invention installed in an electrically conductive panel.

Figure 14 is an isometric top view of the second embodiment of the electrical grounding stud of the present invention installed in an electrically conductive panel.

Figure 15 is an isometric view of a third embodiment of the electrical grounding stud of the present invention.

Figure 16 is a partial cross sectional side view of the third embodiment of the electrical grounding stud of the present invention shown in Figure 15.

Figure 17 is a bottom view of the third embodiment of the electrical grounding stud of the present invention.

Figure 18 is a bottom view of a fourth embodiment of an electrical grounding stud of the present invention.

Figure 19 is a fifth embodiment of an electrical grounding stud of the present invention.

Figure 20 is a partial cross sectional side view of a sixth embodiment of the electrical grounding stud of the present invention shown assembled to a third embodiment of a protective nut.

Figure 21 is a partial cross sectional side view of the electrical grounding stud of Figure 20 assembled to a fourth embodiment of a protective nut of the present invention.

Figure 22 is a partially sectioned side view of a further embodiment of an electrical grounding connector,

Figure 23 is a longitudinal section through the electrical grounding connector of Figure 22 after assembly with a panel member and before withdrawal of the press tool,

Figure 24 is a detail Y corresponding to the circled portion Y of Figure 22,

Figure 25 is a detail Z corresponding to the circled portion Z of Figure 22 and

Figure 26 is a plan view of the electrical grounding connector of Figure 22 as seen in the direction of the arrow XXVI.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The electrical grounding connector and grounding connector assembly of the present invention is particularly adapted for permanent attachment to a panel or plate, particularly a metal sheet or the like, such as utilized in the automotive and appliance industries. The disclosed electrical grounding connector and assembly is particularly well suited for installation by way of conventional press apparatus typical of that utilized in the automotive industry. The method of the present invention is also well suited for application by way of a conventional press. In such applications, the press installs one or more connector assemblies with each stroke wherein the connector assemblies become a permanent part of the panel and are utilized to affix other members such as brackets or the like to the panel. Further, the electrical grounding connector of the present invention is particularly suited for attachment to relatively thin sheets or panels, such as utilized by the appliance industries. Accordingly, as used herein, "panel" refers to any plate, panel, or metal sheet having sufficiently high electrical conductivity to be considered an effective electrical conductor and a thickness sufficiently thin for practical application of the riveting portion of the grounding connector.

Now referring to Figure 1, in a first embodiment, the electrical grounding stud (or connector) 30 of the present invention includes body portion 32 disposed between, and integrally joining, stud portion 34 and riveting portion 36. Body portion 32 includes flange 38 which extends generally radially from body portion 32 and includes panel engaging surface 40 and lug engaging surface 42.

Now referring to Figures 1 and 2, first barbed elements 44 are disposed on at least panel engaging surface 40 or riveting portion 36 of grounding stud 30 and preferably first barbed elements 44 are integral to, and spanned between, panel engaging surface 40 and riveting portion 36.

Second barbed elements 46 are disposed on at least stud portion 34 or lug engaging surface 42 and are preferably integral with and span between stud portion 34 and lug engaging surface 42.

As disclosed in U.S. Patent Nos. 4,831,698; 4,555,838; and 4,610,072 (hereinafter '698, '838 and '072 respectively), disclosures of which are herein incorporated by reference, electrical grounding stud 30 is adapted to be riveted to plastically deformable electrically conductive panel 48. As disclosed in the '838 patent, riveting portion 36 of grounding stud 30 preferably includes an annular wall 50 defining socket 52 within riveting portion 36. As disclosed in the '838 patent, plunger 54 is adapted to cooperate with die member 56 to drive riveting portion 36 of grounding stud 30 through electrically conductive panel 48 thereby deforming riveting portion 36 radially outward forming a secure mechanical interlock between stud 30 and conductive panel 48.

Now referring to Figures 1-3, as plunger 54 drives riveting portion 36 of grounding stud 30 into electrically conductive panel 48, first barbed elements 44 eventually contact, and are driven into, and penetrate, the surface of panel 48. If grounding stud 30 is fashioned without first barbed elements 44 (such as is the stud disclosed in the '838 patent) any non-conductive substance disposed between grounding stud 30 and panel 48 increases the electrical resistance between grounding stud 30 and panel 48 thereby undesirably affecting the grounding capacity of grounding stud 30 and panel 48. In automotive applications, it is common for paints, rust preventative coatings, oils, and other non-electrically conductive (or poor electrically conductive) substances to be deposited (either intentionally or unintentionally) on surfaces of a panel 48 which is to have a grounding stud 30 affixed to it. Because of these materials which reside, or inevitably find their way between grounding stud 30 and panel 48, the fastener set out in the '838 patent (which does not utilize first grounding barbed elements 44) was not effective as an electrical grounding stud (notwithstanding the highly effective mechanical bond between grounding stud 30 and panel 48). By adding first barbed elements 44 to grounding stud 30, any electrically non-conductive residue disposed between grounding stud 30 and panel 48 is penetrated through, and displaced, by first barbed elements 44 during the installation process as first barbed elements 44 penetrate the surface of electrically conductive panel 48. This penetrating engagement between barbed elements 44 and panel 48 creates an excellent bridge for electrical current between the two mating materials. In prototypes of the present invention, it has been demonstrated that when grounding stud 30 of the present invention is in-

stalled on panels which are coated with electrically non-conductive substances such as paint, rust preventative coatings and the like, excellent results are achieved and grounding stud 30 forms an excellent current path to panel 48.

In an application, as shown in Figure 3, an electrically conductive grounding lug 58 is connected to an electrical wire 60 which is to be grounded to panel 48. Grounding stud 30 of the present invention, once fastened to electrically conductive panel 48, provides a simple and inexpensive way of grounding lug 58. If lug 58 is in the form of a "eye" lug, the aperture 60 of lug 58 is passed over stud portion 34 of grounding stud 30 and pressed against lug engaging surface 42 by a nut (nut not shown in Figure 3) or other similar means. By exerting sufficient force upon lug 58, second barbed elements 46 cut into lug 58 thereby displacing any electrically non-conductive contaminants which may reside therebetween ensuring a high integrity electrical connection between lug 58 and grounding stud 30.

As those skilled in the art will readily recognize, the presence of first and second barbed elements 44, 46 respectively, provide a means of securing an electrical grounding lug 58 to a panel 48 in a way which provides an electrical grounding connection of high integrity. Thus, the lug of the present invention overcomes the problems of the prior art lugs which serve as superior mechanical connectors to panel 48, but do not provide the electrical resistance characteristics needed for grounding applications.

Now referring to Figures 1-5, although first and second barbed elements 44, 46 respectively may be fashioned into any number of geometries, excellent results have been achieved using polyhedron type geometries as seen in Figures 1 through Figures 5. It will be understood by those skilled in the art, that a primary concern in achieving good electrical conductivity between lug 58 and grounding stud 30, and grounding stud 30 and panel 48 is primarily a function of the ability of first and second barbed elements 44, 46 to "bite into" and penetrate the surface of lug 58 and panel 48. Thus, in order to achieve the lowest possible electrical resistance between interfacing surfaces, the material composition of lug 58 and panel 48 will have a direct bearing on the preferred geometry and hardness of first and second barbed elements 44, 46.

As disclosed in the aforementioned patents, riveting portion 36 of grounding stud 30 can be used in panels 48 having prepierced openings. Although this may be desirable in some installations, riveting portion 36 is also suited to pierce panel 48 during installation thereby creating its own panel openings. During this piercing operation, slug

62 is severed from panel 48 and can be either discarded through die opening 64 of die member 56 or, in the alternative, can be permanently staked within socket 52. Various techniques for staking slug 62 within socket 52 are disclosed in U.S. Patent Serial No. 07/728,469 which is hereby incorporated by reference.

Now referring to Figures 6 and 7, although many different styles of nuts 66, 68 may be used to secure grounding lug 58 to grounding stud 30, the preferred nut includes one open end and one closed end (closed end indicated at 70). The open end functions to provide a passage way for stud portion 34 of grounding stud 30 to gain entrance into nuts 66, 68 and closed end 70 prevents paint, undercoating or the like from contacting the threads of stud portion 34 or various electrically conductive surfaces of grounding stud 30. Accordingly, nuts 66, 68 prevent paint, undercoating or the like from hampering the electrical integrity between lug 58 and stud 30. Nut 66 differs from that of nut 68 in that nut 66 has a polygonal outer surface along the lower half of its structure while nut 68 has a polygonal surface along the upper half of its structure. Depending upon the particular application, type of installation tools used, and the like, one disclosed embodiment may be desirable over the other. However, each nut 66, 68 functions identically to force lug 58 against second barbed elements 46 thereby forming an electrical connection therebetween of high integrity and, also, functions to keep contaminants and other undesirable substances from contacting stud portion 34 or lug 58. Although only one lug is disclosed in Figures 6 and 7, it is to be understood by those skilled in the art that multiple lugs may be electrically accommodated by a single grounding stud 30 where such a requirement is desirable.

Now referring to Figures 8-10, a second embodiment of the grounding connector of the present invention includes an electrical grounding connector assembly 72. The assembly 72 includes a second embodiment of electrical grounding stud 30 (second embodiment indicated at reference numeral 74) and protective cap 76. The primary difference between electrical grounding connector assembly 72 and that disclosed in conjunction with Figures 1-6, is that the assembly 72 is adapted to be installed, as an assembly, into a panel in a single installation operation. This will be further described in reference to Figures 8-14.

Now referring to Figures 8-10, electrical grounding stud 74 includes body portion 32, stud portion 34, and riveting portion 36. As disclosed in conjunction with grounding stud 30, body portion 32 is disposed between, and integrally joins, stud portion 34 and riveting portion 36. Body portion 32 includes flange 38 which extends generally radially

from body portion 32. Flange 38 includes panel engaging surface 40 and lug engaging surface 42. Panel engaging surface 40 of flange 38 includes first barbed elements 44 and pockets 78. Barbed elements 44 generally rise above panel engaging surface 40 while pockets 74 generally reside below panel engaging surface 40. While first barbed elements 44 function identically to that disclosed in the first embodiment of electrical grounding stud 30 (as discussed in conjunction with Figures 1-7), they also provide, in conjunction with pockets 78, superior anti-rotation resistance upon fastening grounding stud 74 to a panel. The superior anti-rotation resistance is largely due to the fact that the combination of elevated barbs 44 and depressed pockets 78 accommodate under-hit and over-hit conditions which are typically associated with fastener installations techniques which use presses. As understood by those skilled in the art, it is impossible to control the precise stroke upon that a press platen will travel during the course of installing grounding stud 74 in panel 48. Because of this unpredictability, some grounding studs 74 will be forced into a mating panel deeper than preferred (this is commonly known as, an over-hit condition) and alternatively, in some instances, grounding stud 74 will not be driven into the mating panel to the extent that it should be (this is commonly termed as an under-hit condition). Grounding stud 74 of the present invention is particularly well suited to accommodate under-hit and over-hit conditions in that in the event of an over-hit condition, panel metal is driven into pockets 78 thereby giving stud 74 excellent torque resistance while also providing similar panel penetration features associated with first barbed elements 44 (as disclosed in conjunction with Figures 1-7) thereby allowing stud 74 to function adequately as an electrical grounding stud. On the other hand, when ground stud 74 experiences an under-hit condition upon installation (while pockets 78 may experience little to no panel metal contact) raised barbed elements 44 will penetrate into the mating panel surface thereby providing torque resistance and an excellent conductivity interface.

As discussed in conjunction with the grounding stud disclosed in Figures 1-7, first barbed elements 44 preferably extend across panel engaging surface 40 and integrally join annular wall 50 of riveting portion 36. When first barbed elements 44 are fashioned in such a manner, cutting edge 80 is formed at the intersection of panel engaging surface 40 and riveting portion 36 providing a cutting edge which scores the surface of the mating panel during installation of fastener 74 providing excellent electrical conductivity between stud 74 and the electrically conductive panel which stud 74 is fas-

tened to.

Lug engaging surface 42 includes surface 82 which is proximate stud portion 34 and surface 84 which is distal stud portion 34. Surface 82 is raised relative to surface 84 thereby creating step surface 86.

Protective cap 76 is adapted to positively engage stud portion 34 and surface 82 of lug engaging surface 42. Cap 76 is fashioned similar to nuts 66, 68 in that it has only one open end (which accepts stud portion 34). End 70 is closed thereby preventing paint, coatings, and the like from contacting stud portion 34 or surface 82. As will be discussed in conjunction with Figures 11-14, cap 76 is preferably fastened to stud portion 34 of grounding stud 74 prior to installing assembly 72 in an electrically conductive panel. By installing assembly 72 as a single unit into an electrically conductive panel, the panel can be painted, or otherwise coated before or after installing assembly 72, without adversely effecting the grounding characteristics of grounding stud 74. If assembly 72 is installed on an electrically conductive panel after the panel is painted or otherwise coated, barbed elements 44 and pocket 78 will act, as has already been described, to penetrate any coatings on panel 48 to provide an ample grounding path between stud 74 and panel 48. If assembly 72 is subjected to paint or other contaminants once it is installed in an electrically conductive panel, protective cap 76 will prevent stud portion 34 or surface 82 from being contacted by any contaminants. When it is appropriate to attach a grounding lug to stud portion 34, protective cap 76 is simply removed and discarded and a lug is placed around stud portion 34 (as has already been described) and secured thereto by a nut or other suitable means. In view of the above, it is easily understood, that the second embodiment of the grounding connector of the present invention is well suited for achieving good electrical conductivity between itself and a mating panel while also providing excellent torque resistance regardless of under-hit or over-hit installation conditions.

Now referring to Figures 11-14, in the preferred method of installing assembly 72, assembly 72 is placed adjacent panel 48 (see Figure 11) such that riveting portion 36 of electrical grounding stud 34 is proximate panel 48. As discussed in conjunction with Figure 2, plunger 54 is attached to the platen of a press or the like which is adapted to develop sufficient force to pierce panel 48 with riveting portion 36 of electrical grounding stud 74. Surface 84 of flange 38 acts as a plunger engaging surface enabling the downward forces exerted by plunger 54 against electrical grounding stud 74 to be directly transferred to grounding stud 74 (and do not pass through cap 76). It would be imprac-

tical to transmit the downward force of plunger 54 through cap 76 inasmuch as the preferred materials for cap 76 are plastic and the like. Although plastic or the like is the preferred material (because protective cap 76 is typically discarded at the time an electrically conductive lug is placed on stud portion 34), any other inexpensive, readily removable, substitute may be used such as rubber, various coatings, and the like.

As seen in Figure 13, cutting edge 80 forms an excellent electrical interface between electrical grounding stud 74 and electrically conductive panel 48 while the combination of barbed elements 44 and pocket 78 form excellent anti-rotation means accommodating both over-hit and under-hit conditions. As previously explained in conjunction with Figure 3, electrical grounding stud 74 is suited for use both in prepierced panel applications and non-prepierced panel application. When electrical grounding stud 74 is used in non-prepierced panel applications, slug 62, which is severed from panel 48 during installation, can either be discarded or permanently staked within socket 52.

Now referring to Figures 15-19, although many different geometries may be used to accomplish superior electrical interface between electrical grounding stud 74 and an electrically conductive panel, the specific location and geometry of cutting surfaces disposed on electrical ground stud 74 are believed to be important. For example, in the alternative embodiments of electrical grounding stud 74 set out in Figures 15-17, flange 38 is generally polygonal (see Figure 17) having arcuate, coved splines 88 superimposed thereon. Splines 88 intersect panel engaging surface 40 and lug engaging surface 42 thereby creating vertices 90 which form excellent cutting geometries to penetrate panel 48 thereby creating excellent electrical conductivity from electrical grounding stud 74 to mating panel 48. Other embodiments of flange 38 include designing flange 38 with an outer surface resembling that of a hypocycloid preferably having eight cusps 92 (see Figure 18). In the embodiment of grounding stud 74 set out in Figure 18, cusps 92 function similarly to that of vertices 90.

Still, in an alternative embodiment, Figure 19 shows flange 38 being generally polyogonal having a plurality of arcuate raised surfaces 94 superimposed thereon. It is fully contemplated that geometries other than those shown in Figures 3, 9, and 15-19 are also suitable for providing excellent electrical conductivity between assemblies using electrical grounding stud 74 and mating panel 48.

Now referring to Figure 20, in a preferred embodiment, protective nut 96 also functions as a means for translating the downward force of plunger 54 to the electrical grounding stud during

the installation process. As can be seen from Figure 20, unlike the embodiment of nut 76 set out in Figure 8, if nut 96 is comprised of metal or the like, it can be designed with sufficient strength to withstand the downward force exerted against it by plunger 54 during the installation process. By designing nut 96 from metal, or other similar materials, several advantages are gained. Firstly, the radius of flange 38 can be reduced (over that disclosed in conjunction with the embodiment of electrical grounding stud shown in Figures 8-14). This is possible because plunger engaging surface 84 is not needed and therefore can be eliminated. This, of course, results directly in a cost saving due to reduced materials and also results in a weight reduction per unit electrical grounding stud. As can be seen from Figure 20, plunger 54 acts directly against external surface 71 of closed end 70 of nut 96. The force is translated through nut 96 causing electrical grounding stud 74 to pierce through panel 48 in the manner which has already been discussed. In order to ensure positive engagement between plunger 54 and external surface 71, plunger 54 is designed having gap 100.

In an alternative approach, plunger 54 is adapted to bear upon engaging surface 84 of nut 96 thereby transferring a downward force against electrical grounding stud 74 through lug engaging surface 42. In order to ensure positive contact between plunger 54 and engaging surface 84, plunger 54 is designed having gap 100.

In addition to the reduction in weight and cost associated with eliminating plunger engaging surface 84 from flange 38, an additional benefit is realized when nut 96 is constructed from metal. This additional benefit arises because nut 96 can, in addition to providing the protective function which has already been discussed in conjunction with protective cap 76, be used as the means for securing an electrical grounding lug to lug engaging surface 42 of electrical grounding stud 74. For example, once electrical grounding stud 74 is fastened to electrically conductive panel 48, metal nut 96 is unthreaded, at least partially, (or otherwise removed) from stud portion 34 and an electrical grounding lug is placed against lug engaging surface 42 of electrical grounding stud 74. Then, metal nut 96 is drawn against the electrical lug such that a secure electrical contact is made between the grounding lug and lug engaging surface 42. This approach has the obvious advantage over constructing the nut from plastic in that the plastic nuts are simply disposed of after they provide their protective function and must be replaced by a metal nut to perform the function of securing a grounding lug to the electrical grounding stud. In a high production setting, the discarded plastic nuts must be collected and disposed of in an orderly

fashion in order to eliminate potential safety hazards and other problems associated with improperly discarded nuts. The metal nut disclosed in Figures 20 and 21 eliminates this problem inasmuch as the metal nut services to both protect stud portion 34 from contaminants while also serving the utilitarian function of securing an electrical grounding lug against lug engaging surface 42 of electrical grounding stud 74.

Figs. 22 to 26 show further views of an alternative form of an electrical grounding connector which is a preferred embodiment and which is provided with a preferably metallic nut member forming a cap 76 which is used not only to positively engage and protect the stud portion from paint, underseal or other such compounds but also to fit the piercing and riveting stud member 30 to a panel member 48 in a manner similar to that described above with reference to Figs. 20 and 21, but with certain detail differences in the method as will be later described in more detail. In principle the grounding stud 30 of Fig. 22 resembles closely the grounding stud of Fig. 8 and it is provided with the same barbs 44 and pockets 78 at its panel engaging surface 40.

The flange 32 also has an end face 42 adjacent the stud portion 34 but in this embodiment the end face is a simple flat radial surface, i.e. it does not have the raised portion 82 of the stud of Fig. 8. The other detailed difference of the stud member 30 of Fig. 22 which is worthy of mention is the reduced diameter end portion 110 which merges via a conical surface 112 into the body of the stud portion. In the completed device this reduced diameter end portion 110 allows an electrical connection lug to be readily fitted over the end of the stud, and can also facilitate handling of the stud member and the assembly during manufacture.

The female nut member 76 forming the cap is of a special design, arising in part from the method of fitting which will now be outlined before considering the detail of the female nut member.

As can be seen from Figs. 22 and 23, and also partly from Fig. 26, the end portion 110 of the grounding stud 30 projects upwardly through the female nut member 76 and the assembly comprising the grounding stud and the nut member is fitted into a panel by means of a plunger 54. The plunger 54 has a working surface 130 which engages the annular end face 71 of the female nut member 76 and presses the opposite end face 114 thereof against the flange end face 42 to drive the piercing and riveting portion 36 of the grounding stud 30 through the panel 48 into the semitoroidal die cavity 116 of die member or die insert 56.

It will be noted that after the fitting of the grounded connector assembly to the panel 48 the lower face 118 of the plunger 54 is spaced from

the surface of the panel by a distance x (Fig. 23) which also corresponds to the distance between the end face 42 of the grounding stud 30 and the top surface of the panel. In this way the plunger 54 is prevented from contacting the top surface of the panel 48 itself and from damaging the same - even if the panel is pre-painted. Moreover, the surface 42 of the flange of the stud member stands proud of the top surface of the panel and ensures that after loosening or removal of the female nut member 76 the electrical connecting lug fitted under the nut and over the stud electrically contacts the grounding stud rather than the panel (where only a faulty contact might arise) and also does not damage any paint applied to the panel.

Several details of the female nut member are worthy of particular mention.

The grounding connector assembly shown here is in particular distinguished from the grounding connector assembly which have been previously illustrated and disclosed in that the screwed on female nut element 76 is open upwardly (as already mentioned), i.e. so that the shaft of the screw portion of the stud projects out of the screwed on nut element. In addition the nut element 76 is provided with a clamping portion 120 in the form, in this embodiment, of a generally cylindrical collar which has at least one and preferably a plurality of equally angularly disposed radial recesses 122 which have been mechanically deformed inwardly to grip slightly on the threaded portion of the stud. This has the particular advantage that the assembly can be put together at the time of manufacture so that the surface 114 contacts the surface 42 and so that this relative position is not lost in subsequent transport and handling. There is also no danger of the nut becoming separated from the grounding stud and being lost, which would be inconvenient and could cause damage in an automatic handling system, or in the press.

Moreover, it will be noted from the detail Y of Fig. 24 that the end face 42 of the flange 32 is essentially a radial surface perpendicular to the longitudinal axis of the grounding stud, whereas the end face 114 of the female nut member 76 confronting the end face 42 is a very shallow cone surface which converges radially inwardly and upwardly and thus results in an annular line contact between the surface 114 and the surface 42 at the position indicated by the reference numeral 124 in Fig. 24. This contact at this position ensures that paint, underseal etc. is reliably kept away from the surface 42 so that it cannot impair electrical grounding at this position. That is to say a sealing occurs between the shoulder of the stud member and the circular ring surface of the nut due to the circular line contact between the shoulder edge of the stud member and the end surface of the nut

member. Good seal is ensured by the high surface pressure caused by the tightening torque with which the two elements are screwed together and it is this that guarantees the paint seal contact.

The detail Z of Fig. 25 shows the end face 71 of the nut member on which the working surface 130 of the plunger 54 acts during the piercing and riveting procedure. In addition Fig. 25 shows the clearance 126 which takes the form of a narrow air gap and which is expediently provided between the outer diameter of the threaded shaft of the stud member 30 and the upper part 127 of the nut element 76 which can be regarded as a sleeve portion of the nut. The threaded portion 128 of the female nut member 76 is restricted to a few complete turns of the thread and these thread turns engage threaded stud portion 34 of the grounding stud 30 at a portion intermediate the sleeve portion 127 and the end face 114. The reason for this is to ensure that the force which acts on the female nut member during the piercing and riveting operations, and which is transferred to the nut member via the end face 71, does not lead to extensive contact between the female nut member and the stud. Without the air gap the insertion force which exerts a generally compressive action on the nut element could lead to impermissible clamping effects between the nut and the thread of the stud which would hinder the later release of the nut element necessary for the fitting of the electrical connection lug. Indeed substantial deformation or clamping action could result in destruction of the thread element during removal of the nut.

The gap 126 is in any case dimensioned to be sufficiently small so that it provides a sufficient protection for the threaded portion 34 of the grounding stud 30, and so that excessive quantities of paint or underseal are unlikely to penetrate into the gap 126. In any case the preassembled nut will tend to remove such depositions, if any, on being unscrewed to permit fitting of the electrical connection lug. Thus the nut exerts a type of cleaning action on the thread above it. The actual threads 128 themselves prevent any paint or underseal reaching the electrical contact surface 42 of the flange 32 of the grounding stud 30. Such depositions will not affect the electrical conductivity and could indeed assist the self-locking action of the nut on retightening the same. A slight intentional thread deformation produced during fitting of the grounding assembly would be used to produce the same effect, or to supplement the locking at the collar portion 120.

Finally, it will be noted that the sleeve portion 127 of the female nut member 76 is preferably formed as a hexagonal driving member so that the nut is tightened and released by way of torque applied to this hexagonal portion. The spacing of

this portion above the collar portion has the particular advantage that thick electrical cables attached by a lug to the grounding stud do not hinder the application of a driving tool to the hexagonal portion.

Having described the preferred embodiment of the grounding connector, grounding connector assembly, and the preferred methods of attaching the grounding connector and grounding connector assembly to an electrically conductive panel, it will be understood that various modifications or additions may be made to the preferred embodiments chosen here to illustrate the present invention, without departing from the spirit of the present invention. For example, the relative dimensions of the grounding connectors and associated nuts herein disclosed will depend largely upon the particular application at hand and the selected panel thicknesses. As has been herein described, the grounding connector and grounding connector assembly is particularly suited for attachment to electrically conductive panels such as utilized for body and structural components in the automotive and appliance industries. As will be understood by those skilled in the art, the connector assembly of the present invention is preferably formed of plastically deformable metal, preferably steel, which may be heat treated for surface hardness, ductility, and other desirable features. A suitable material for the fasteners herein disclosed is medium carbon steel suitable for cold forming, including SAE 1022, 1023, and 1030 steels. Excellent results have been achieved with steels in the range of SAE 1020 through SAE 1040. Reference also may be made to the earlier cited patents for further information regarding suitable installation, apparatus, self-piercing and riveting fasteners and methods of installing same. Accordingly, it is typically understood that the subject matter sought to be afforded protection hereby shall be deemed to extend to the subject matter defined in the appended claims, including all fair equivalents thereof.

Claims

1. An electrical grounding connector for attachment to an electrically conductive panel, said electrical grounding connector of the type having a body portion disposed between, and integrally joining, a stud portion and a riveting portion, wherein said riveting portion may be a piercing and riveting portion and wherein said body portion includes a flange portion extending generally radially from said body portion, said flange portion having a panel engaging surface and a lug engaging surface, said electrical grounding connector comprising: first barbed means, disposed on at least one of

said riveting portion and said panel engaging surface of said flange portion, for conducting electrical current between said electrical grounding connector and said conductive panel when said electrical grounding connector is forced against said electrically conductive panel; and

second barbed means, disposed on at least one of said stud portion and said lug engaging surface of said flange portion, for conducting electrical current between said electrical grounding connector and a conductive lug when said conductive lug is forced against said electrical grounding connector.

2. The electrical grounding connector of claim 1 wherein said riveting portion includes an annular wall defining a socket within said riveting portion, being optionally adapted to pierce said electrically conductive panel, and preferably being continuous and adapted to pierce a slug from said electrically conductive panel.

3. The electrical grounding connector of claim 1 or claim 2, wherein said first barbed means extends between, and is integral with, said riveting portion and said panel engaging surface of said flange portion.

4. The electrical grounding connector of any one of the preceding claims, wherein said second barbed means extends between, and is integral with, said stud portion and said lug engaging surface of said flange portion, and wherein said barbed means preferably includes a projection having a generally polyhedron form.

5. The electrical grounding connector of any one of the preceding claims, wherein said flange portion includes an outer surface having a generally cylindrical contour.

6. An electrical grounding connector assembly for attachment to an electrically conductive panel, said electrical grounding connector assembly of the type having a grounding stud connector having a body portion disposed between, and integrally joining, a stud portion and a riveting portion, wherein said riveting portion may be a piercing and riveting portion and wherein said body portion includes a flange portion extending generally radially from said body portion, said flange having a panel engaging surface and a lug engaging surface, said electrical grounding connector assembly comprising: barbed means, disposed on at least one of said riveting portion and said panel engaging

- surface of said flange portion, for conducting electrical current between said electrical grounding connector assembly and said conductive panel when said electrical grounding connector is joined to said electrically conductive panel; and
- a cap adapted to cooperatively engage and substantially cover said stud portion of said grounding stud connector and also adapted to cover said lug engaging surface of said flange thereby protecting said stud portion and said lug engaging surface of said flange from contaminants.
7. The electrical grounding connector assembly of claim 6, wherein said riveting portion includes an annular wall defining a socket within said riveting portion, being optionally adapted to pierce said electrically conductive panel, and preferably being continuous and adapted to pierce a slug from said electrically conductive panel.
 8. The electrical grounding connector assembly of claim 6 or claim 7, wherein said barbed means extends between, and is integral with, said riveting portion and said panel engaging surface of said flange portion.
 9. The electrical grounding connector assembly of one of claims 6, 7 or 8, wherein said flange portion includes an outer surface having a generally cylindrical contour.
 10. The electrical grounding connector assembly of any one of claims 6 to 9, wherein said lug engaging surface of said flange includes a portion of said flange proximate said stud and wherein said portion of said flange proximate said stud is raised relative to a portion of said flange distal said stud, said portion of said flange distal said stud preferably including a plunger engaging surface for engaging a plunger which is adapted to drive said connector assembly into said electrically conductive panel, and said panel engaging surface of said flange preferably including a plurality of spaced pockets.
 11. The electrical grounding connector assembly of any one of claims 6 to 10, wherein said flange portion includes an outer surface having a generally polygonal contour, in particular a generally polygonal contour having depressions superimposed thereon, said depressions in particular being generally arcuate, or said generally polygonal contour has arcuate raised surfaces superimposed thereon.
 12. The electrical grounding connector assembly of claim 6, wherein said flange portion includes an outer surface having a generally hypocycloid outer contour, said hypocycloid outer surface preferably having eight cusps.
 13. The electrical grounding connector assembly of any one of the preceding claims 6 to 12, wherein said cap is metal.
 14. The electrical grounding connector assembly of claim 13, wherein said metal cap includes a load bearing flange having first and second opposed load bearing surfaces, said first load bearing surface being adapted to engage said lug engaging surface of said flange portion of said grounding stud connector and said second load bearing surface being adapted to engage a plunger, said plunger being adapted to drive said grounding connector assembly into said electrically conductive panel, and/or wherein said metal cap includes first and second load bearing, opposing ends, said first load bearing end being adapted to engage said lug engaging surface of said flange portion of said grounding connector, and said second load bearing end being adapted to engage a plunger, said plunger being adapted to drive said connector assembly into said conductive panel.
 15. An electrical grounding connector assembly assembled to an electrically conductive member comprising:
 - a male fastener having a body portion disposed between, and integrally joining, a stud portion and a riveting portion, said body portion including a flange extending generally radially outwardly from said body portion, said flange having a panel engaging surface and a lug engaging surface, said riveting portion terminating in a radially deformed lip, said male fastener including first barbed means, disposed on at least one of said panel engaging surface of said flange and said riveting portion, for conducting electrical current between said male fastener and said electrically conductive member;
 - a plastically deformable, electrically conductive panel member including an opening intimately surrounding said riveting portion of said male fastener, said male fastener entrapped within said panel opening between said radially deformed lip and said radially extending flange, wherein said first barbed means is in continuous electrical contact with said electrically conductive panel thereby forming an electrically conductive path between

said electrically conductive panel and said male fastener, and

a female element having a body portion having an axial bore therein, said axial bore adapted to engage said stud portion of said male fastener, wherein said female element is adapted to cover said stud portion of said male fastener and also cover said lug engaging surface of said flange thereby protecting said stud portion and said lug engaging surface of said flange from contaminants.

16. The electrical grounding connector assembly of claim 15, wherein said radially deformed lip is deformed outwardly and comprises a generally U-shaped channel which opens generally toward said flange portion of said male fastener.

17. The electrical grounding connector assembly of claim 15, wherein said panel member includes a generally planar portion distal said panel opening and a deformed panel portion proximate said panel opening, said deformed panel portion being displaced from said planar portion, said deformed panel portion thereby engaging said first barbed means and providing a path for electric current between said panel member and said male fastener.

18. The electrical grounding connector assembly of any one of said preceding claims 15 to 17, wherein said riveting portion includes an annular wall defining a socket within said riveting portion, being optionally adapted to pierce said electrically conductive panel member, and preferably being continuous and is adapted to pierce a slug from said electrically conductive panel.

19. The electrical grounding connector assembly of any one of claims 15 to 18, wherein said first barbed means extends between, and is integral with, said riveting portion and said panel engaging surface of said flange portion, wherein said flange portion preferably includes an outer surface having a generally cylindrical contour, wherein said lug engaging surface of said flange optionally includes a portion of said flange proximate said stud and wherein said portion of said flange proximate said stud is preferably raised relative to a portion of said flange distal said stud, said portion of said flange distal said stud optionally including a plunger engaging surface for engaging a plunger which is adapted to drive said connector assembly into said electrically conductive panel.

20. The electrical grounding connector assembly of any one of claims 15 to 19, wherein said panel engaging surface of said flange includes a plurality of spaced pockets, and said assembly optionally further includes second barbed means disposed on at least one of said stud portion and said lug engaging surface of said flange portion, for conducting electrical current between said male fastener element and a conductive lug when said conductive lug is forced against said second barbed means by said female element, said female element being preferably of metal and preferably including a load bearing flange having first and second opposed load bearing surfaces, said first load bearing surface being adapted to engage said lug engaging surface of said flange portion of said grounding stud connector and said second load bearing surface being adapted to engage a plunger, said plunger being adapted to drive said grounding connector assembly into said electrically conductive panel, and/or wherein said metal female element includes first and second load bearing, opposing ends, said first load bearing end being adapted to engage said lug engaging surface of said flange portion of said grounding connector, and said second load bearing end being adapted to engage a plunger, said plunger being adapted to drive said connector assembly into said conductive panel.

21. An electrical grounding connector or connector assembly, optionally assembled with an electrically conductive panel member and comprising a female nut member engaging or engageable over said stud portion, said female nut member having an end face contactable with an end face of said flange opposite to said panel engaging face, a thread portion extending over a restricted number of thread turns (e.g. typically in the range from 2 to 10 and preferably about 5 thread turns, said thread portion engaging with corresponding threads of said stud portion, and a further sleeve portion extending over at least a part of the still preferably threaded length of said stud member but spaced therefrom.

22. An electrical grounding connector or connector assembly, optionally assembled with an electrically conductive panel member, in accordance with claim 21, characterised in that a portion of said female nut member is deformed, preferably radially deformed, into frictional contact with said stud portion, said deformed portion preferably comprising said threaded portion of said female nut member.

23. An electrical grounding connector or connector assembly, optionally assembled with an electrically conductive panel member, in accordance with either one of claims 21 or 22, wherein said end face of said female nut member and/or said flange end face is slightly conical, said end face of said female nut member and said flange end face contacting one another over an annular line contact preferably over an annular line contact adjacent a radially outer surface of said female nut member and/or of said flange.
24. An electrical grounding connector or connector assembly, optionally assembled with an electrically conductive panel member, in accordance with any one of the preceding claims 21 to 23, wherein said female nut member has a polygonal driving section and a generally cylindrical collar portion, said collar portion being preferably located at the level of said thread portion and optionally being deformed to grip at said thread portion and said polygonal preferably hexagonal section being coincident at least in part with said sleeve portion.
25. A method of attaching an electrical grounding connector assembly to an electrically conductive panel, said electrical grounding connector assembly of the type having a grounding stud connector and a displaceable cap, said grounding stud connector having body portion disposed between, and integrally joining, a stud portion and a riveting portion, said body portion including a flange portion extending generally radially from said body portion, said flange having a panel engaging surface and a lug engaging surface, said electrical grounding connector assembly including barbed elements disposed on at least one of said riveting portion and said panel engaging surface of said flange portion for conducting electrical current between said electrical grounding connector assembly and said conductive panel when said electrical grounding connector is joined to said electrically conductive panel, said displaceable cap being adapted to cooperatively engage and substantially cover said stud portion and also adapted to cover said lug engaging surface of said flange thereby protecting said stud portion and said lug engaging surface of said flange from contaminants, said method comprising the steps of:
- (a) placing said riveting portion of said electrical grounding connector assembly adjacent said electrically conductive panel;
 - (b) passing said riveting portion through said panel thereby causing said barbed elements to contact said panel providing a path for electrical current between said electrical grounding connector assembly and said panel;
 - (c) radially deforming said riveting portion of said grounding stud connector thereby mechanically bonding said electrical grounding connector assembly to said panel;
 - (d) displacing said cap from said lug engaging surface; and
 - (e) securing an electrically conducting lug against said lug engaging surface of said flange.
26. The method of claim 25, wherein step (b) simultaneously includes using said riveting portion of said grounding stud connector for piercing a slug from said panel, said step (b) being optionally performed by exerting a force against the flange portion of the grounding stud connector or by exerting a force against said cap, wherein step (c) preferably includes deforming said panel riveting portion of said grounding stud connector into a U-shaped channel, said channel opening generally toward said flange of said grounding stud connector and said panel substantially fills said U-shaped opening in interlocking engagement therewith, and wherein step (e) is preferably performed by moving said displaced cap towards said lug engaging surface of said flange.

Fig-1

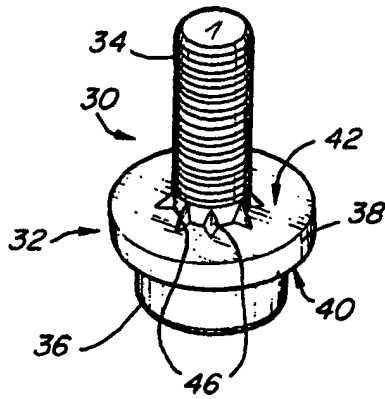


Fig-2

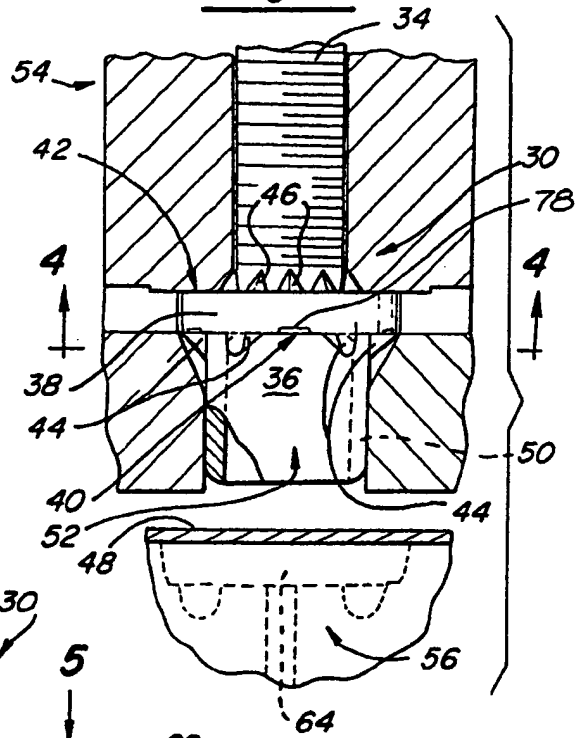


Fig-3

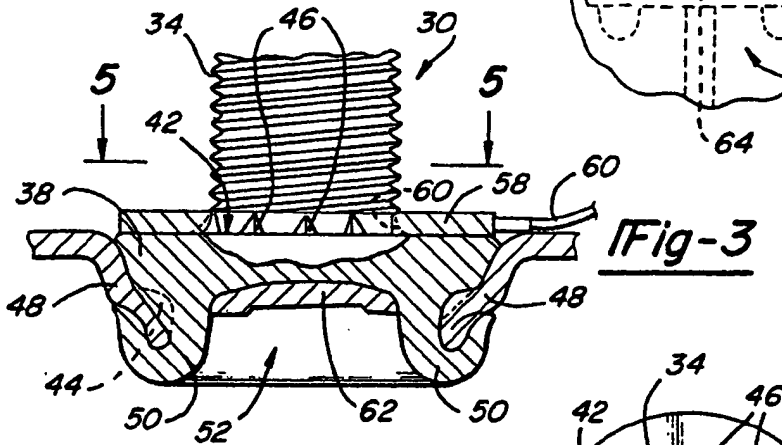


Fig-4

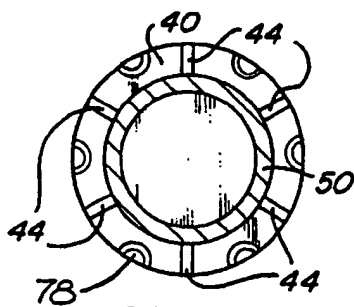
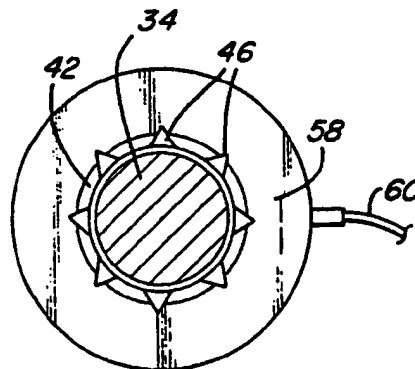


Fig-5



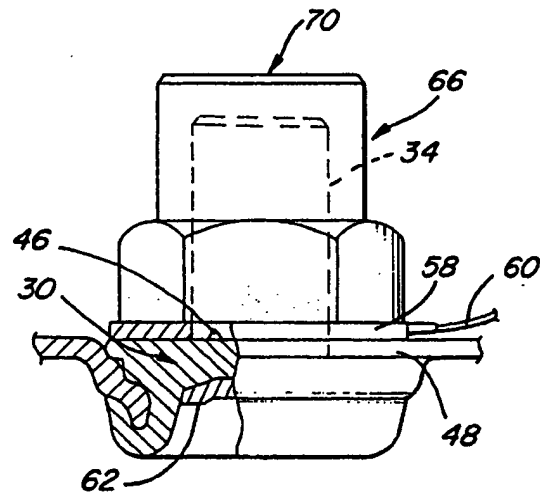


Fig-6

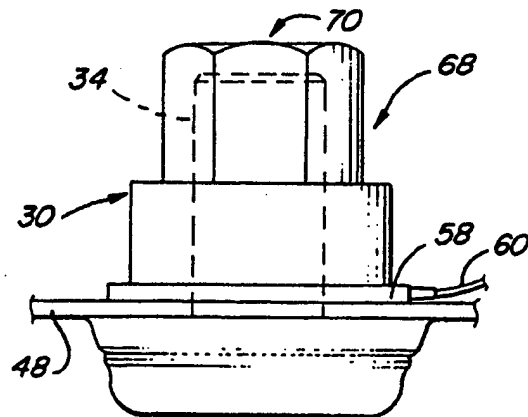


Fig-7

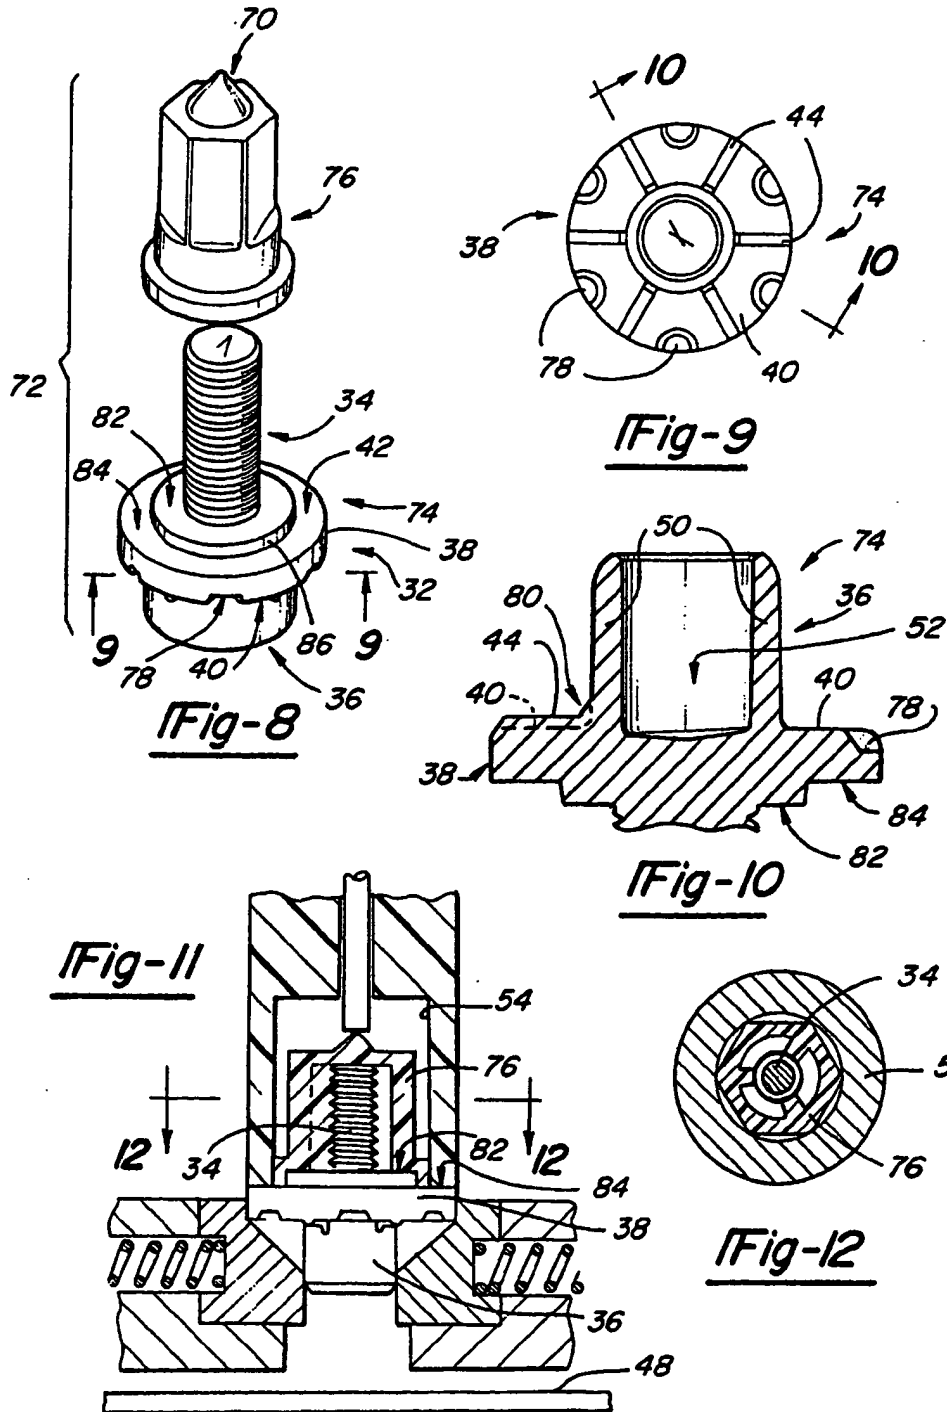


Fig-13




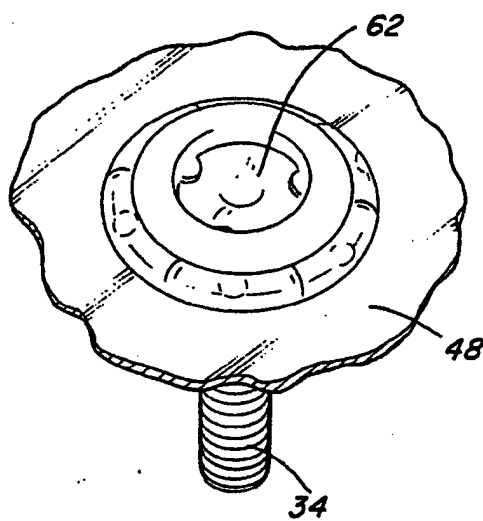


Fig-14

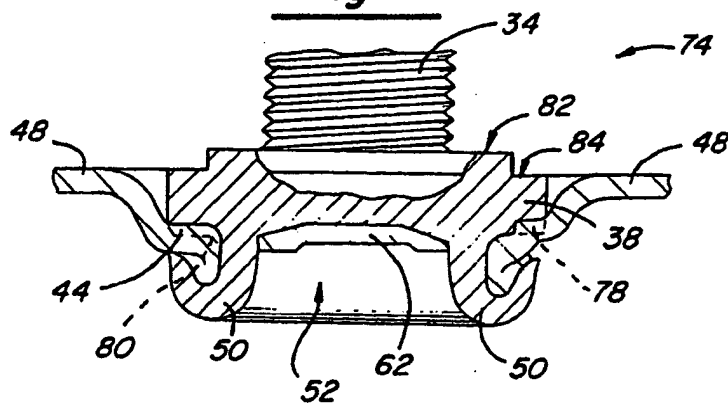

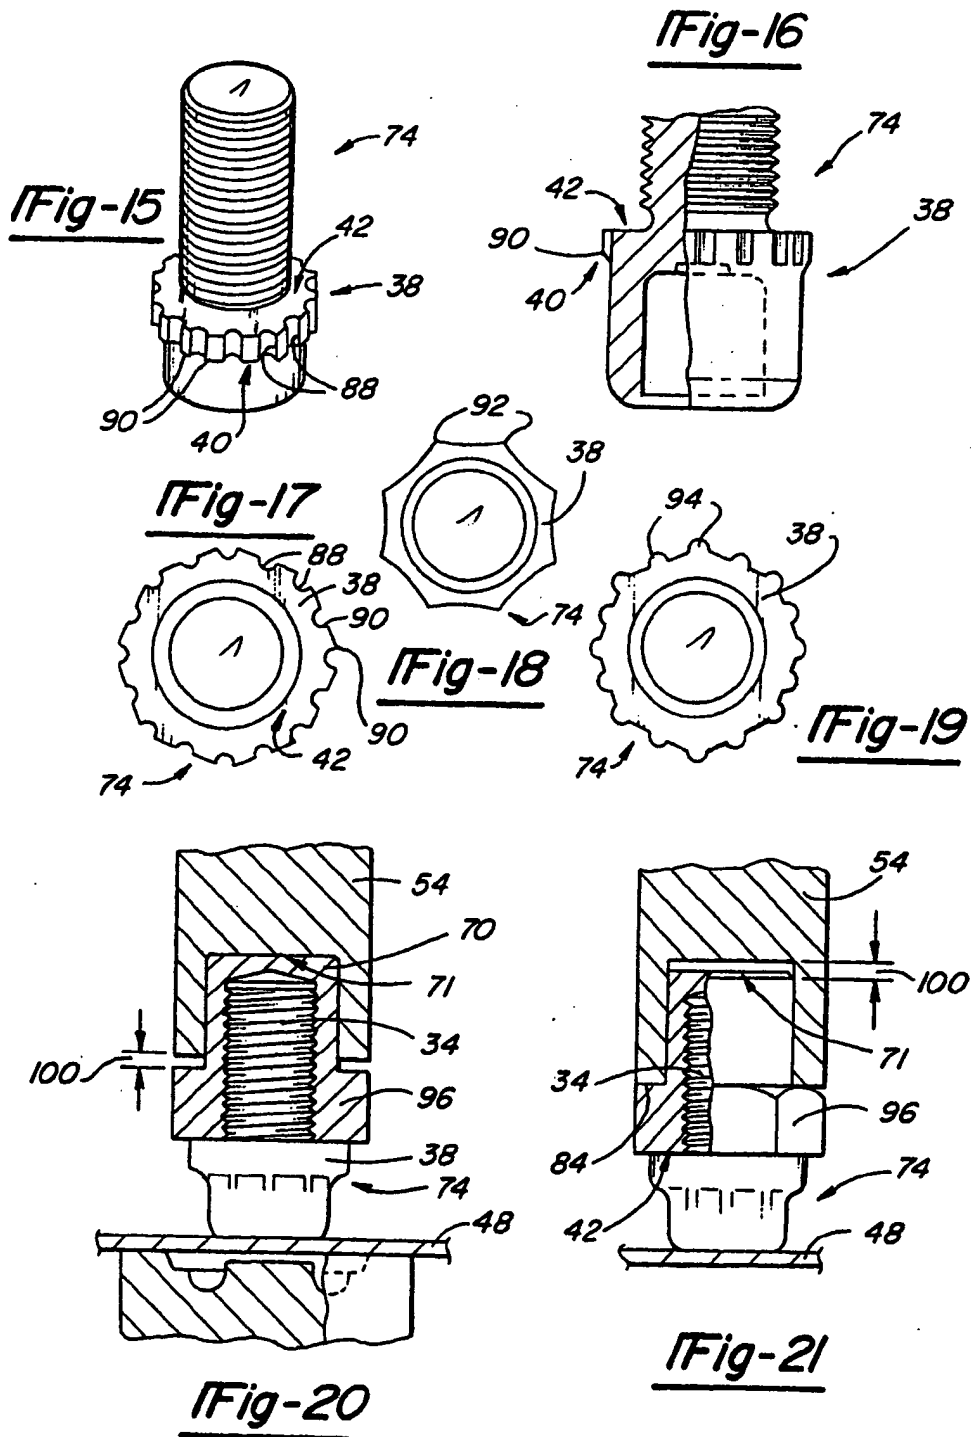

(19)

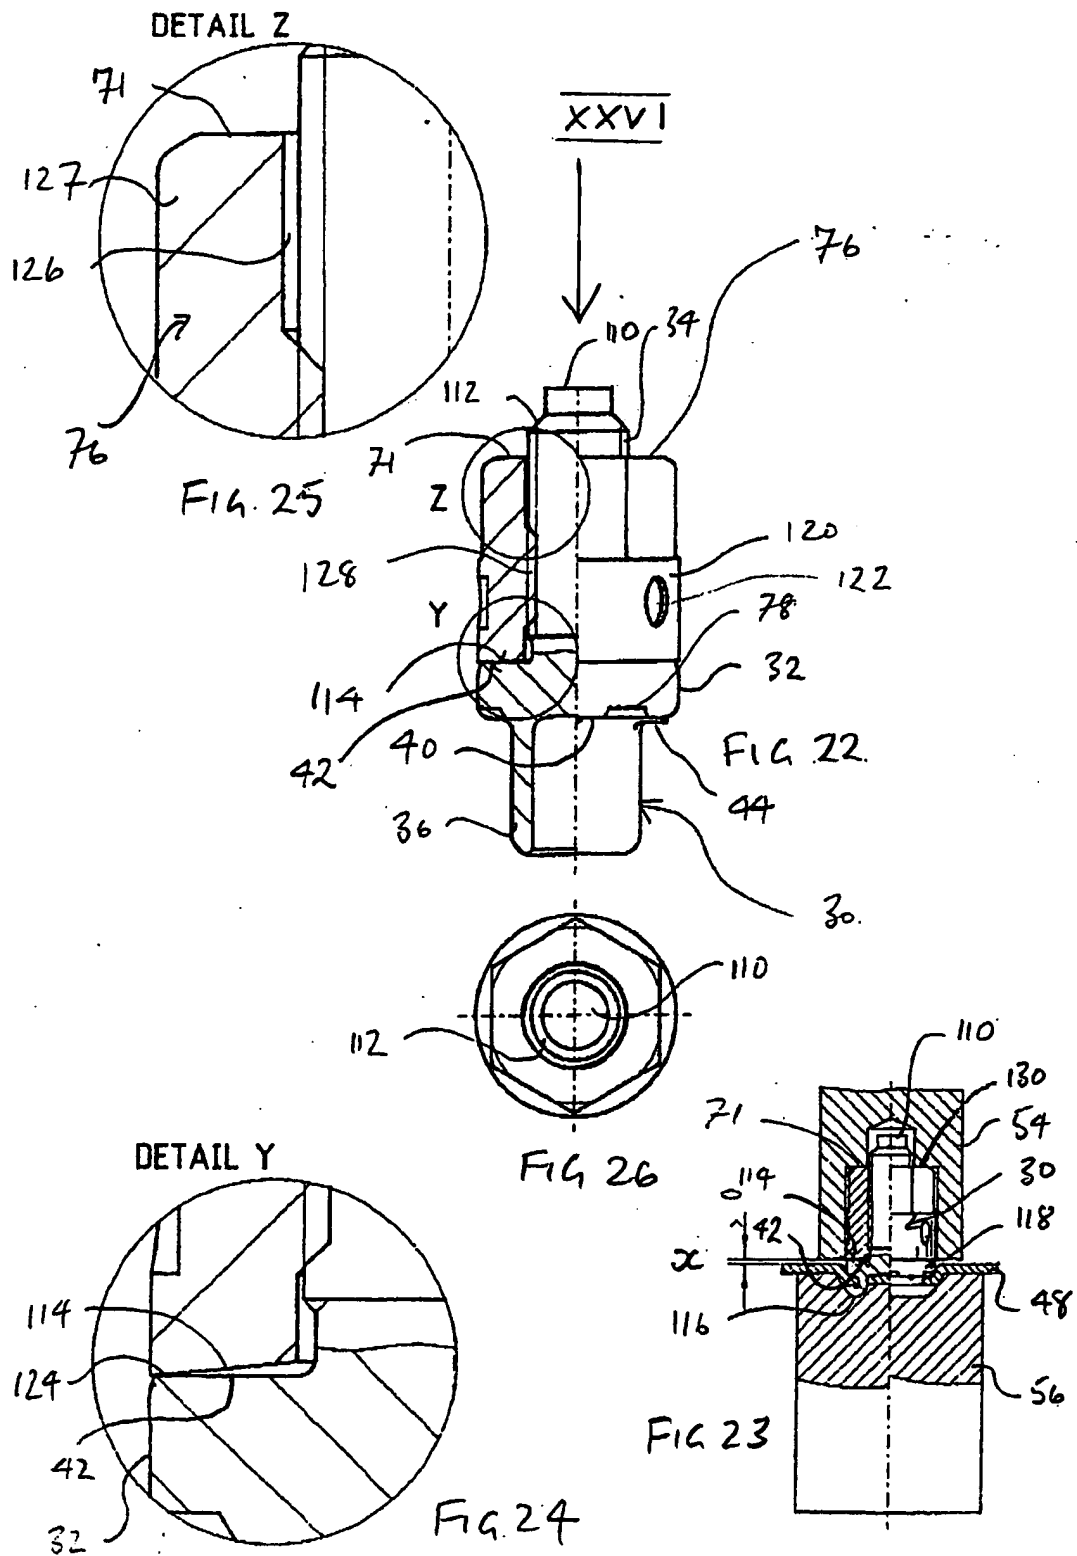

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 540 030 A3

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **92118625.0**

(51) Int. Cl.⁵: **H01R 4/64**, H01R 4/26,
F16B 37/06, H01R 4/06,
H01R 4/30

(22) Date of filing: **30.10.92**(30) Priority: **31.10.91 US 786243**

(43) Date of publication of application:
05.05.93 Bulletin 93/18

(84) Designated Contracting States:
DE ES FR IT

(88) Date of deferred publication of the search report:
02.03.94 Bulletin 94/09

(71) Applicant: **PROFIL-Verbindungstechnik GmbH
& Co. KG**
Otto-Hahn-Strasse 22-24
D-61381 Friedrichsdorf(DE)


(72) Inventor: **Ladouceur, Harold A.**
30123 Bentley
Livonia, Michigan 48154(US)
Inventor: **Müller, Rudolf R.M.**
Fasanenweg 6
W-6000 Frankfurt-56(DE)

(74) Representative: **Dipl.-Phys.Dr. Manitz**
Dipl.-Ing.Dipl.-Wirtsch.-Ing. Finsterwald
Dipl.-Phys. Rotermund Dipl.-Chem.Dr. Heyn
B.Sc.(Phys.) Morgan
Postfach 22 16 11
D-80506 München (DE)

(54) **Electrical grounding stud.**

(57) An electrical grounding connector, electrical grounding connector assembly, and a method of attaching an electrical grounding connector and electrical grounding connector assembly to an electrically conductive panel is disclosed. The grounding connector assembly includes a grounding stud connector having a body portion disposed between, and integrally joining, a stud portion and a riveting portion. The body portion includes a flange extending generally radially from the body portion and the flange includes a panel engaging surface and a lug engaging surface. A protective nut is adapted to engage in substantially cover the stud portion of the grounding stud connector thereby protecting the stud portion from contaminants. Barbed elements are disclosed on various surfaces of the grounding connector thereby giving the grounding connector excellent electrically conductive properties when it is assembled to an electrically conductive panel. In a preferred embodiment, the grounding connector is preassembled with the protective nut, thereby allowing the assembly to be installed on an electrically conductive panel in one step. While the grounding

connector and connector assembly is particularly suited for self-piercing applications, it may be used equally well in prepierced applications.

Fig-1**EP 0 540 030 A3**



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 92 11 8625

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
D, Y	GB-A-2 068 493 (PROFIL VERBINDUNGSTECHNIK GMBH & CO. KG.)	1,2,15-18,25,26	H 01 R 4/64 H 01 R 4/26 F 16 B 37/06 H 01 R 4/06 H 01 R 4/30
A	* page 1 - page 3, line 122; figures 1-6 *	6,7	
Y	DE-U-8 225 078 (KLÖCKNER MÖLLER ELEKTRIZITÄTS GMBH) * page 3 - page 6; figures 1-5 *	1,2	
Y	FR-E- 1 618 (M. WILIAM ROWLAND EDWARDS) * the whole document *	6,15-18,25,26	
Y	US-A-3 922 050 (LETTINI ET AL.)	6	
A	* column 1 - column 12, line 8; figures 1-8 *	1,2,5,9	
A	EP-A-0 166 929 (ESGE-MARBY GMBH & CO. KG.) * page 8 - page 17; figures 1-4 *	1,3,15,25	
A	DE-A-3 133 638 (RICHARD BERGNER GMBH & CO.) * page 3 - page 13; figures 1-8 *	1,4,6,15	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 29-09-1993	Examiner TAPPEINER R
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			



European Patent
Office

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ All claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claims:
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet -B-

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☒ None of the further search fees has been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims: 1-20, 25, 26



European Patent
Office

EP 92 11 8625 -B-

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims 1-20,25,26 : Grounding stud.
2. Claims 21-24 : Female nut member.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.